

JKM310P-72

POLY CRYSTALLINE MODULE

290-310 Watt

Jinko Solar introduces a brand-new line of high performance modules in wide application.




KEY FEATURES

- High module conversion efficiency (up to 15.98%), through superior manufacturing technology
- Perfect module self-cleaning capability, reduce power loss caused by dust (soiling effect)
- Excellent performance in low-light irradiance environment
- Extreme environment durability, low power degradation under high temperature
- Entire module certified to withstand high wind loads (2400 Pascal)

QUALITY&SAFETY

- Positive power tolerance of -0/+3% *
- 10 year warranty on material & workmanship *
- Industry leading power output warranty (12 years/90%, 25 years/80%)
- Premium linear performance warranty *

Premium Performance Warranty

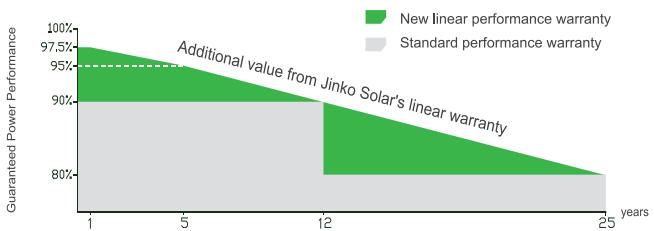


* Based on customer requirements and contract terms

ISO9001:2008、ISO14001:2004、OHSAS18001 certified factory
IEC61215、IEC61730、IEC61701、IEC62716 certified products

APPLICATIONS



Engineering Drawings

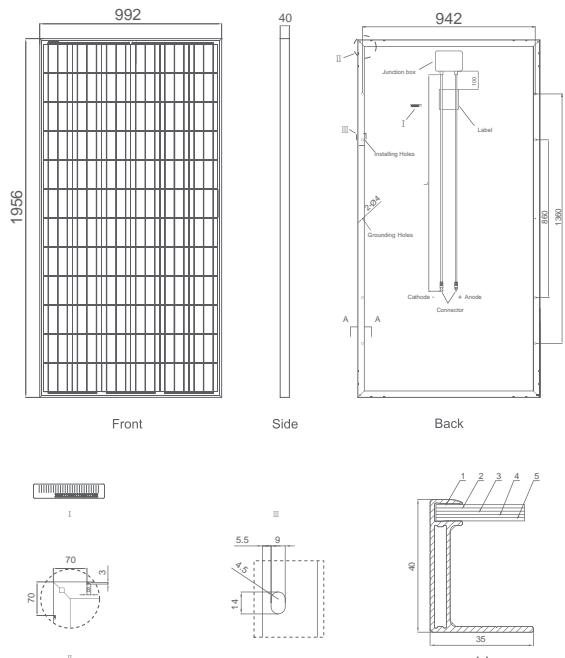


Packaging Configuration

(Two boxes =One pallet)

25pcs/ box, 50pcs/pallet, 550 pcs/40'HQ Container

Electrical Performance & Temperature Dependence

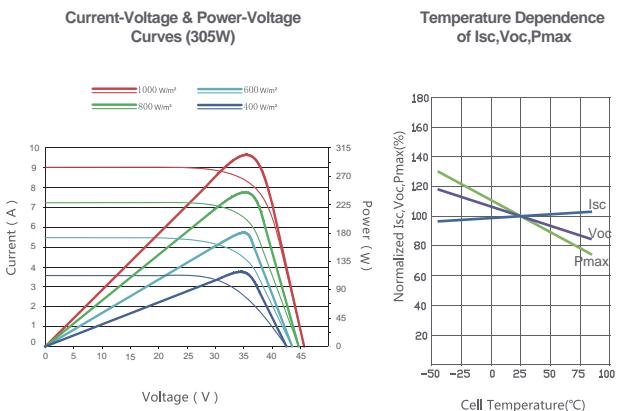

Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)	
No.of cells	72 (6×12)	
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)	
Weight	26.5 kg (58.4 lbs.)	
Front Glass	4.0mm, High Transmission, Low Iron, Tempered Glass	
Frame	Anodized Aluminum Alloy	
Junction Box	IP67 Rated	
Output Cables	TÜV 1×4.0mm ² , Length:900mm	

SPECIFICATIONS

Module Type	JKM290P		JKM295P		JKM300P		JKM305P		JKM310P												
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT											
Maximum Power (Pmax)	290Wp	213Wp	295Wp	217Wp	300Wp	220Wp	305Wp	224Wp	310Wp	229Wp											
Maximum Power Voltage (VmP)	35.8V	33.1V	36.2V	33.4V	36.6V	33.5V	36.8V	33.9V	37.0V	34.2V											
Maximum Power Current (ImP)	8.11A	6.44A	8.15A	6.50A	8.20A	6.56A	8.30A	6.62A	8.38A	6.68A											
Open-circuit Voltage (Voc)	44.9V	41.7V	45.1V	41.8V	45.3V	42.1V	45.6V	42.3V	45.9V	42.5V											
Short-circuit Current (Isc)	8.69A	7.03A	8.76A	7.09A	8.84A	7.16A	8.91A	7.21A	8.96A	7.26A											
Module Efficiency STC (%)	14.95%		15.20%		15.46%		15.72%		15.98%												
Operating Temperature(°C)	-40°C~+85°C																				
Maximum system voltage	1000VDC (IEC)																				
Maximum series fuse rating	15A																				
Power tolerance	0~+3%																				
Temperature coefficients of Pmax	-0.43%/°C																				
Temperature coefficients of Voc	-0.32%/°C																				
Temperature coefficients of Isc	0.06%/°C																				
Nominal operating cell temperature (NOCT)	45±2°C																				

STC: ☀ Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: ☀ Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s

* Power measurement tolerance: ± 3%