

SOLAR'S MOST TRUSTED



REC TWINPEAK 2S 72 SERIES


PREMIUM SOLAR PANELS WITH SUPERIOR PERFORMANCE

REC TwinPeak 2S 72 Series solar panels feature an innovative design with high efficiency and an industry-leading lightweight, yet robust construction, enabling customers to get the most out of the installation area.

Combined with the product quality and reliability of a strong and established European brand, REC TwinPeak 2S 72 panels are ideal for commercial rooftops worldwide.



**REDUCES BALANCE OF
SYSTEM COSTS**

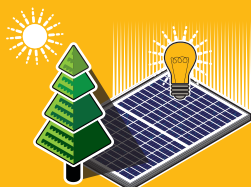

**IMPROVED PERFORMANCE
IN SHADED CONDITIONS**




**INDUSTRY-LEADING LIGHTWEIGHT
72-CELL PANEL**



**100%
PID FREE**

REC TWINPEAK 25 72 SERIES

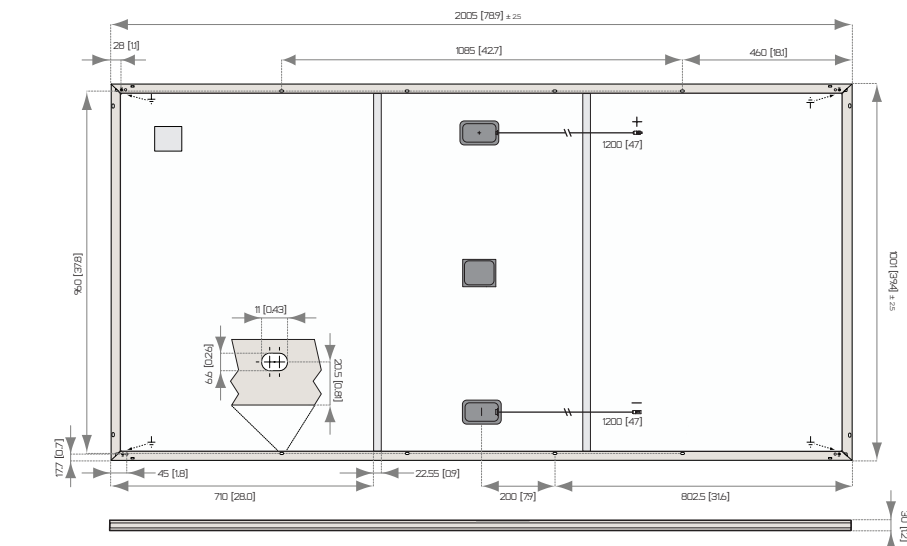

All measurements in mm [in]

ELECTRICAL DATA @ STC		Product Code*: RECxxxTP25 72				
Nominal Power - P_{MAX} (Wp)	330	335	340	345	350	355
Watt Class Sorting - (W)	-0/+5	-0/+5	-0/+5	-0/+5	-0/+5	-0/+5
Nominal Power Voltage - V_{MPP} (V)	38.1	38.3	38.5	38.7	38.9	39.1
Nominal Power Current - I_{MPP} (A)	8.67	8.75	8.84	8.92	9.00	9.09
Open Circuit Voltage - V_{OC} (V)	46.0	46.2	46.3	46.5	46.7	46.8
Short Circuit Current - I_{SC} (A)	9.44	9.52	9.58	9.64	9.72	9.78
Panel Efficiency (%)	16.5	16.7	16.9	17.2	17.4	17.7

Values at standard test conditions STC (airmass AM 1.5, irradiance 1000 W/m², cell temperature 77°F (25°C).
At low irradiance of 200 W/m² (AM 1.5 and cell temperature 77°F (25°C)) at least 95% of the STC module efficiency will be achieved.
*xxx indicates the nominal power class (P_{MAX}) at STC, and can be followed by the suffix XV for modules with a 1500 V maximum system rating.

ELECTRICAL DATA @ NOCT		Product Code*: RECxxxTP25 72				
Nominal Power - P_{MAX} (Wp)	244	252	257	260	264	268
Nominal Power Voltage - V_{MPP} (V)	34.9	35.5	35.7	35.8	36.0	36.2
Nominal Power Current - I_{MPP} (A)	6.99	7.10	7.19	7.25	7.32	7.39
Open Circuit Voltage - V_{OC} (V)	42.3	42.8	42.9	43.1	43.2	43.3
Short Circuit Current - I_{SC} (A)	7.44	7.74	7.79	7.84	7.90	7.95

Nominal cell operating temperature NOCT (800 W/m², AM 1.5, windspeed 1 m/s, ambient temperature 68°F (20°C).
*xxx indicates the nominal power class (P_{MAX}) at STC, and can be followed by the suffix XV for modules with a 1500 V maximum system rating.

CERTIFICATION



UL 1703, Fire classification: Type 1 (1500 V XV); Type 2 (1000 V);
IEC 61215, IEC 61730, IEC 62804 (PID), IEC 62716 (Ammonia),
IEC 61701 (Salt Mist level 6), ISO 11925-2 (Class E)
ISO 9001: 2015, ISO 14001: 2004, OHSAS 18001: 2007

WARRANTY

20 year product warranty
25 year linear power output warranty
Max. performance degradation of 0.5% p.a. from 97.5% in year 1
See warranty conditions for further details.

17.7% EFFICIENCY
20 YEAR PRODUCT WARRANTY
25 YEAR LINEAR POWER OUTPUT WARRANTY

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT) 44.6°C (±2°C)
Temperature Coefficient of P_{MAX} -0.36 %/°C
Temperature Coefficient of V_{OC} -0.30 %/°C
Temperature Coefficient of I_{SC} 0.066 %/°C

GENERAL DATA

Cell type: 6 strings of 24 REC half-cut mc-Si PERC
Glass: 3.2 mm (0.13") solar glass with anti-reflection surface treatment
Back Sheet: Highly resistant polyester
Frame: Anodized aluminum (silver)
Support bars: Anodized aluminum
Junction Box: IP67 rated with 3 bypass diodes
4 mm² (12 AWG) PV wire, 1.2 m + 1.2 m (47" + 47")
Connectors: Stäubli MC4-Evo 2
PV-KBT4-EVO-2 / PV-KST4-EVO-2 (4 mm²)
in accordance with IEC 62852, IP68 only when connected
Tonglin TL-Cable 01S-F (4 mm²)
in accordance with IEC 62852, IP68 only when connected
Origin: Made in Singapore

MAXIMUM RATINGS

Operational temperature: -40 ... +85°C (-40 ... +185°F)
Maximum System Voltage: 1000 V / 1500 V
Design load (+): snow 75.2 lbs/ft² (3600 Pa)*
Maximum test load (+): 112.8 lbs/ft² (5400 Pa)*
Design load (-): wind 33.4 lbs/ft² (1600 Pa)*
Maximum test load (-): 50.1 lbs/ft² (2400 Pa)*
Max series fuse rating: 25 A
Max reverse current: 25 A
* Safety factor 1.5
* See installation manual for mounting instructions

MECHANICAL DATA

Dimensions: 2005 x 1001 x 30 mm (78.9" x 39.4" x 1.2")
Area: 2.01 m² (21.6 ft²)
Weight: 22 kg (48.5 lbs)

Note! Specifications subject to change without notice.

Founded in Norway in 1996, REC is a leading vertically integrated solar energy company. Through integrated manufacturing from silicon to wafers, cells, high-quality panels and extending to solar solutions, REC provides the world with a reliable source of clean energy. REC's renowned product quality is supported by the lowest warranty claims rate in the industry. REC is a Bluestar Elkem company with headquarters in Norway and operational headquarters in Singapore. REC employs around 2,000 people worldwide, producing 1.5 GW of solar panels annually.


www.recgroup.com

Specifications subject to change without notice.

Ref: PM-DS-07-13 Rev-E 01.20